



## Rack Console Drawers

### 17" and 19" Modular LCD Drawers

Access your servers with a streamlined, highly customizable Raloy rack console drawer. Integrate a modular KVM switch to control multiple servers from a single unit. Consolidate server access for virtually any environment, in 1U.



#### RF117HD - 17" HD LED

DVI-D & VGA Video Input  
MAC Style Keyboard Available  
1080P LED Backlit LCD




#### RWX119 - 19" Widescreen


DVI-D + VGA Video Input  
Second Generation Short Depth  
1440 x 900 High Contrast LCD

### Best In Class

- 2nd Generation, cutting-edge, modern design fits into only 1U of rack space - optional 2-post mounting available.
- Simple to install, configure, and operate for easy, at-the-rack access of all your rack-based servers.
- Sharp image rendering and video performance allow for high-quality user experiences.
- Supports Windows, Linux, Mac, and other operating Systems.
- PS/2 and USB interface with included 6 foot console cable - PS/2 support by request.
- Industry-leading 2 year warranty, extendable up to 5 years.
- Modular scalability: Integrated KVM, video options, 15 languages in PC, SUN or MAC keyboard layout, and audio support.



Model	RWX119	RF117HD
Dimensions ( LxWxH )	17.4 x 18.1 x 1.73" ( 441.6 x 460 x 44 m )	17.4 x 18.9 x 1.73" ( 441.6 x 480 x 44 m )
Net Weight	25.3 lb ( 11.5 kg )	23.8 lb ( 10.8 kg )
KVM Cable ( included )	6 ft Combo Cable (VGA, USB)	6 ft Combo Cable (DVI, USB)
<b>LCD Panel / Video &amp; Audio</b>		
Display Size	19-inch Widescreen TFT color LCD	17.3-inch Widescreen TFT color LCD
Max Resolution (dots x lines)	1440 x 900	1920 x 1080
Backlight Type	CCFL	LED
Brightness ( nits )	300	400
Contrast Ratio	1000:1	600:1
Color	16.7 M	16.7 M, 8-bit
Viewing Angle ( H/V )	160° x 160°	160° x 140°
Standard Video Input	VGA	VGA, DVI-D
Optional Video Input	HDMI, DVI, Composite (BNC), S-Video	HDMI, VGA
Plug & Play	VESA EDID 1.3	
Audio	Optional Built-in Dual Stereo Speakers 2W x 2	
<b>Power</b>		
Supply Range	Auto-sensing 100 to 240VAC, 50 / 60Hz	
<b>Keyboard</b>		
Keyboard / Mouse	104-key Notepad Keyboard / Glidepoint Touchpad	
Keyboard Layout	Windows ( standard )	Windows ( standard ), <b>MAC</b> , SUN
Keyboard Languages	United States ( standard ), United Kingdom, Germany, France, Spain, Norway, Italy, Russia, Switzerland, Netherlands, Portugal, China, Japan, Korea, Arabia, Turkey	
<b>Environmental Specifications</b>		
MTBF ( hrs )	50,000	
Operation Temperature	32 to 131°F ( 0 to 55°C )	
Storage Temperature	-4 to 140°F ( -20 to 60°C )	
Operating Humidity	20~90%, non-condensing	
Storage Humidity	5~90%, non-condensing	
Operating Altitude	16,000 ft ( 4,876.8 meters )	
Storage Altitude	40,000 ft ( 12,192 meters )	
Shock	10G acceleration ( 11ms duration )	
Vibration	5~500Hz 1G RMX random vibration	
<b>Regulatory</b>		
Certifications	FCC, CE, UL, cUL, REACH and RoHS2	FCC, CE, REACH and RoHS2
Warranty	2 years parts & labor, extendable to 5 years	

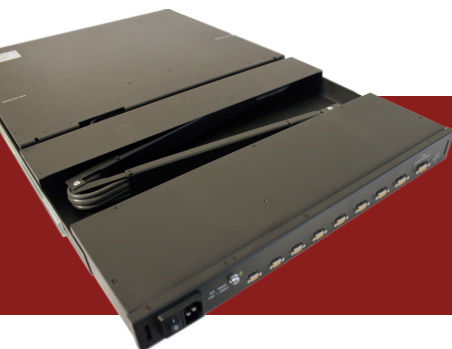

**Access | Integrate | Consolidate**

**Dependable, integrated KVM switches for quick, efficient at-the-rack access of your critical servers.**