


These drawings and specifications are the exclusive property of Martin International Enclosures, Inc. and shall not be copied, reproduced or used for any purpose at all without prior written permission of Martin International Enclosures, Inc. (MIE) except to manufacture for MIE, Inc. the items on the drawings. These drawings are issued in strict confidence.

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE		

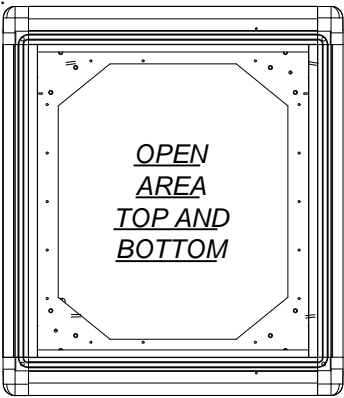

28.330
24.090
22.310

A


.625
.625
.500
.295

CONTINUOUS
EIA HOLE
SPACING


A

FRONT VIEW

32.420
OVERALL FRAME
DEPTH
30.000
MAXIMUM RAIL TO
RAIL SPACING
24.000
DEFAULT
CENTER RAIL
SPACING

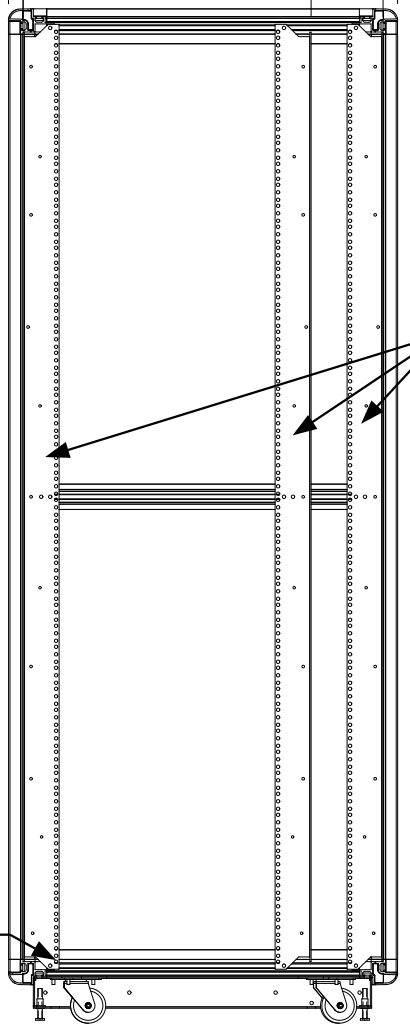

SIDE SECTION VIEW

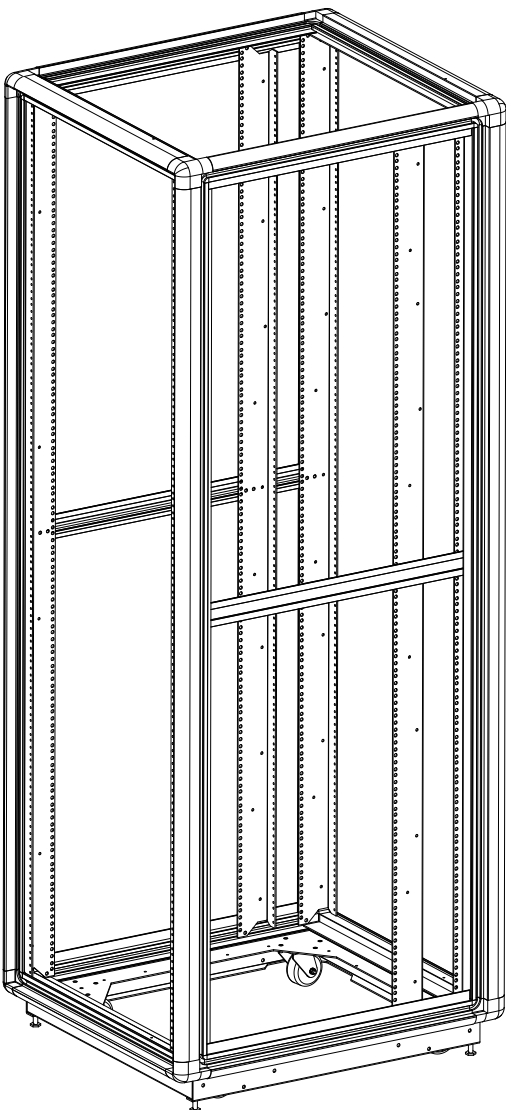

84.58
81.33
83.29
77.09

21.810

.281 DIA
CLEARANCE
HOLES IN REAR
VERTICAL RAIL
FLANGES

.159 DIA
MOUNTING HOLE
TAPPED 10-32

MATERIAL

TOLERANCES
EXCEPT AS NOTED
DECIMAL
.X = +/- .060
.XX = +/- .030
.XXX = +/- .010
ANGULAR
+/- 1/2 DEG



PART NAME

44U X 30" DEEP; 23" RACKMOUNT
EXTRUDED ALUMINUM FRAME

SIZE
B

DATE
3/6/18

PART #

772330-TR10

REV
A

DRAWN BY: JQ

APPROVED BY:

SCALE = 1/16

FINISH: A/R

SHEET

1 OF 1

NEXT UPPER ASSEMBLY:

PROGRAM#

DATE

SETBACK=

DATE