

These drawings and specifications are the exclusive property of Martin International Enclosures, Inc. and shall not be copied, reproduced or used for any purpose at all without prior written permission of Martin International Enclosures, Inc. (MIE) except to manufacture for MIE, Inc. the items on the drawings. These drawings are issued in strict confidence.

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE		

OPEN
AREA
TOP AND
BOTTOM

28.330
24.090
23.310
A

.625
.625
.500

.295

22.810

CONTINUOUS
EIA HOLE
SPACING

32.420
OVERALL FRAME
DEPTH

30.000
MAXIMUM RAIL TO
RAIL SPACING


24.000
DEFAULT
CENTER RAIL
SPACING

FULLY ADJUSTABLE
VERTICAL MOUNTING
RAILS
(3 PAIR)

.281 DIA
CLEARANCE
HOLES IN REAR
VERTICAL RAIL
FLANGES

.159 DIA
MOUNTING HOLE
TAPPED 10-32

SIDE SECTION VIEW

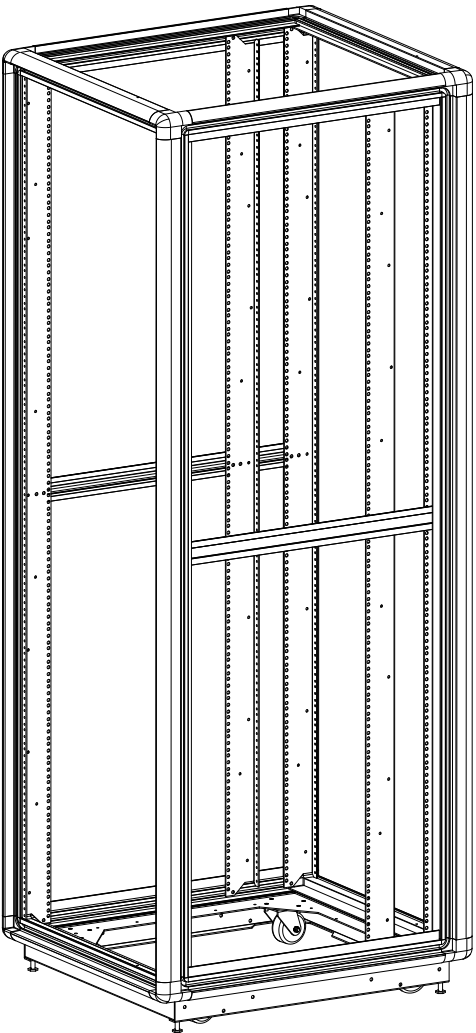

FRONT VIEW

NEXT UPPER ASSEMBLY:

PROGRAM#

DATE

SETBACK=

DATE

MATERIAL

TOLERANCES
EXCEPT AS NOTED
DECIMAL
.X = +/- .060
.XX = +/- .030
.XXX = +/- .010
ANGULAR
+/- 1/2 DEG

DRAWN BY: JQ

APPROVED BY:

martin
INTERNATIONAL ENCLOSURES, INC.

PART NAME

44U X 30" DEEP; 24" RACKMOUNT
EXTRUDED ALUMINUM FRAME

SIZE

B

DATE

3/27/18

PART #

772430-TR10

REV

A

SCALE = 1/17

FINISH:

A/R

SHEET

1 OF 1